


Technical Specification – Metric Lifting Points



Part Code	WLL tonnes	M Thread	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	S mm	SW mm	Torque in Nm	Mass Kg
8-211-003	0.3	M8	30	35	35	10	11	85	55	29	6	13	30	0.2
8-211-006	0.63	M10	30	35	36	10	16	85	55	29	6	17	60	0.3
8-211-010	1.0	M12	33	37	44	14	18	98	57	36	8	19	100	0.5
8-211-012	1.2	M14	33	37	45	14	21	98	57	36	10	22	120	0.5
8-211-015	1.5	M16	33	37	46	14	24	98	57	36	10	24	150	0.5
8-211-020	2.0	M18	50	54	57	17	26	140	82	44	12	30	200	1.3
8-211-025	2.5	M20	50	54	57	17	30	140	82	44	12	30	250	1.3
8-211-040	4.0	M24	50	54	59	17	36	140	82	44	14	36	400	1.4
8-211-042	4.0	M27	60	65	79	23	38	170	99	62	17	41	400	2.8
8-211-050	5.0	M30	60	65	81	23	48	170	99	62	17	46	500	3.1
8-211-070	7.0	M36	60	65	88	23	54	178	99	65	22	55	700	3.3
8-211-080	8.0	M36	77	85	101	27	62	225	124	78	22	55	800	5.8
8-211-100	10.0	M42	77	85	104	27	72	225	124	78	24	65	1000	6.3
8-211-150	15.0	M42	95	104	112	36	63	256	158	86	24	65	1500	10.9
8-211-200	20.0	M48	95	104	120	36	72	259	158	90	27	75	2000	11.6

- Grade 10 Lifting Points are suitable for 360° rotation with a 90° degree pivot function.
- Bolts are metric thread (ASME/ANSI B18.3.1M), specification is a grade 10.9 alloy socket head screw per DIN EN ISO 4762.
- Proof Loaded tested individually to 2.5 times Working Load Limit.
- Rated at 100% at 90° angle.
- Extended bolts available on request.

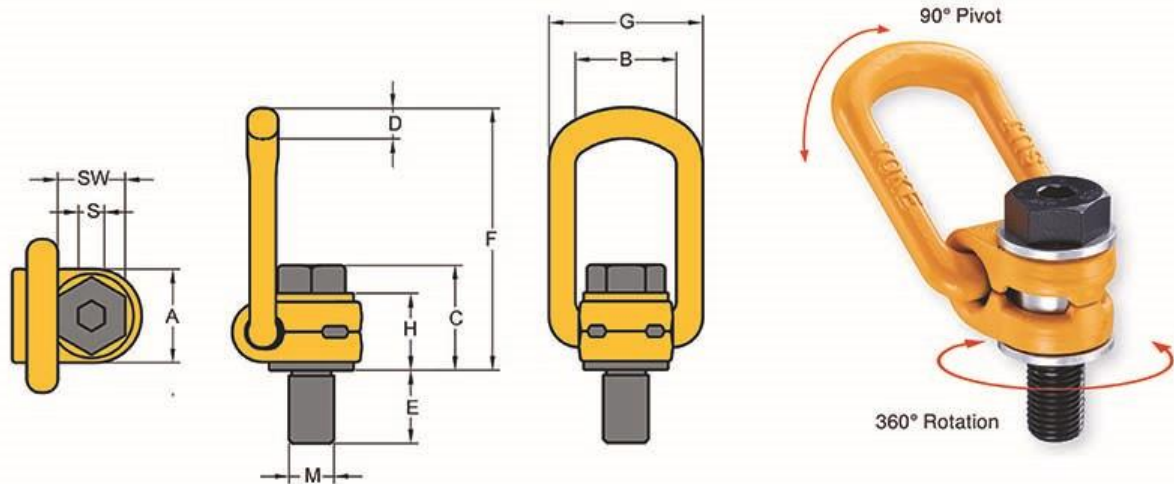